


Equalizer HAN

The Easee Equalizer HAN is made to optimize your power consumption. It prevents the main fuse from tripping and enables you to utilize all available power for EV charging when possible. It is easily connected to the HAN port on your smart meter and with a one-click setup it communicates with your Charging Robot(s), via Easee Link™ over radio or WiFi.



Why choose Easee Equalizer HAN?

Smart power management

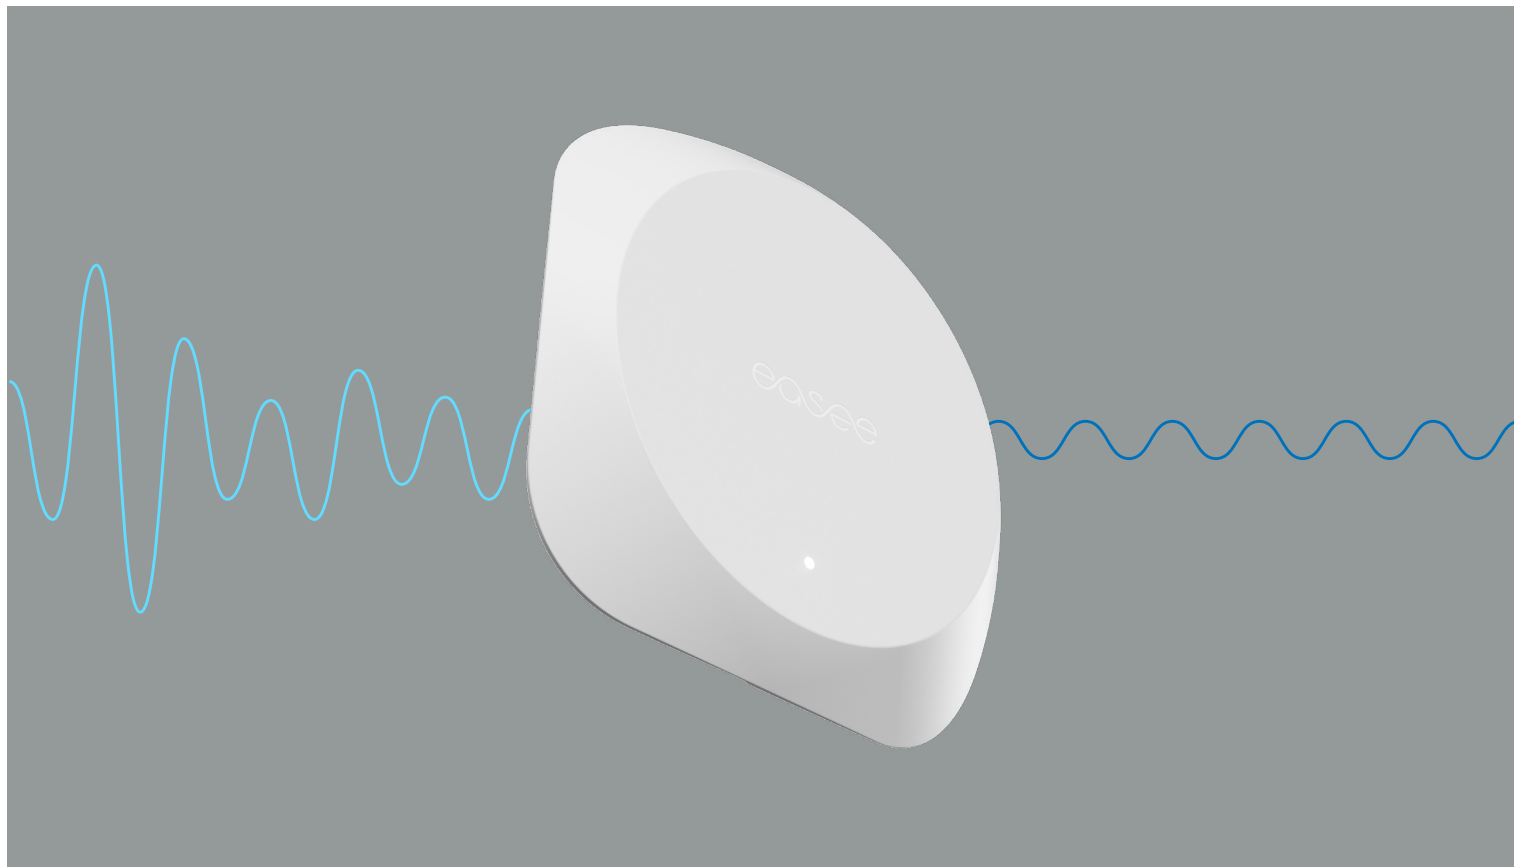

Benefits

- Automatic load balancing between the Charging Robot(s) and the building
- Avoid overload and power interruption while charging your EV
- Charge your EVs faster when the general consumption in the building is low*
- Plug & Play – one-click setup*
- Communication over Easee Link™ directly with your chargers or by WiFi*
- Monitor the power consumption in your building through the Easee app
- Snap it directly onto your fuse cabinet with its magnetic backside
- No external power needed
- Up to 50m coverage in open air*

For a list of supported meters, go to <http://easee.support>

*When used together with an Easee Charging Robot.

Why choose Easee Equalizer HAN?

Charge when there is available power

The Easee Equalizer HAN makes sure that the charging of your EVs is done at the most convenient time, when the demand for other loads is low.

When you have paired your Easee Equalizer HAN to the system, it will automatically start to balance the available power in the building based on its readings and optimize your charging experience.


Easee Link™ will ensure that the automatic load balancing will continue to work even if the connection with the cloud is interrupted or should there be a problem with your WiFi.



Monitoring

While the main purpose of the Easee Equalizer HAN is to optimize the charging experience, it also provides the opportunity to monitor your daily power consumption through the Easee App.

With a full overview of your home's consumption, you have the power literally in your hands to save energy and hence the environment.

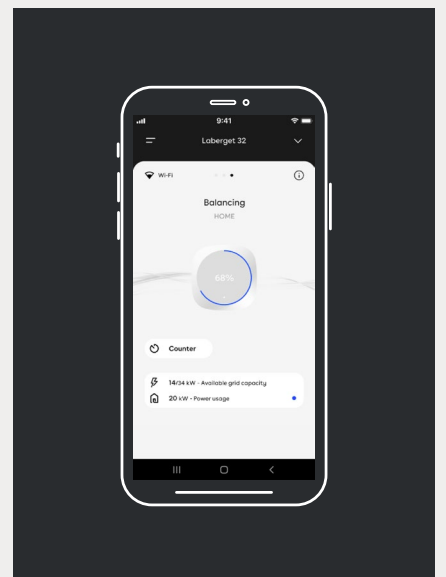

Specifications

Measurement
in mm



Technical

General

Product (mm): H: 110 x W: 110 x D: 27.5
Packaging (mm): H: 130 x W: 130 x D: 39
Operating temperature: -20 °C to +50 °C
Weight: 110 g
Material: PC/ABS
Colour: White
IP degree: IP40
Supply: 20-32 V DC 30 mA
RJ12 connector

Cabling

Cable length: 1.5 m
RJ12 to RJ45 custom made cable
It can be extended using an extension cable:
up to 200 m
Integrated magnets for attaching the
product to metal surfaces or to wall
mount plate


Connectivity

Easee Link RFTM and WiFi¹
HAN (NVE/AMS) smart meter communication
Modbus connection to energy meter²
Monitor power consumption with
the Easee App
RFID / NFC reader


¹WiFi is required for normal operation and for future software updates. When offline or unstable, it will use Easee Link RF™ as backup in small installations with one primary charger. Easee Link RF™ via radio may be limited by walls, concrete or other obstacles.

²Only for supported meters.

The product contains



Equalizer HAN



Cable



Wall mount plate

The information in this document is for information purposes only, is provided as is, and may be subject to change without notice. Easee ASA including its subsidiaries does not accept any liability for the correctness or completeness of the information and illustrations, and is not liable or responsible for your considerations, assessments, decisions or absence of such, or other use of the information in this document.

No part of this publication may be re-published, reproduced, transmitted or re-used in any other form, by any means or in any form, for your own or any third-party's use, unless otherwise agreed with Easee or its subsidiaries in writing. Any permitted use shall always be done in accordance with good practice and ensure that no harm may be caused to Easee or by misleading the consumer.

Easee and Easee products, product names, trademarks and slogans, whether registered or not, are Easee's intellectual property and may not be used without Easee's prior written permission. All other products and services mentioned may be trademarks or service marks of their respective owners.

The latest version of this publication can be downloaded at <http://easee.support>

March 2025 - Version 2.01
© 2020 by Easee ASA. All rights reserved.



Easee ASA
Vassbotnen 23
4033 Stavanger
Org.nr: 920 292 046

Easee is distributed and maintained by a network of qualified partners and resellers. Find more information and your local partner at:

www.easee.com